

Датчики низкого давления. Серия 107. Описание.

По вопросам продаж и поддержки обращайтесь: sro@nt-rt.ru

www.sor.nt-rt.ru

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04

Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64

Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Казахстан (7273)495-231

Киргизия (996)312-96-26-47

Таджикистан (992)427-82-92-69


107 Low Differential Pressure Switches

Low Differential Pressure Switches for Air & Gas Applications

SOR® low differential pressure switches are robust, field-mounted instruments designed for the process industries. These instruments accurately read very low pressures by utilizing a diaphragm with a large sensing area. The switching element is SPDT. An external Set Point adjustment with visual indication is standard, allowing for simplified calibration of the switch.

Applications

Built to high-quality standards for reliability, this switch is suitable for draft ranges commonly associated with HVAC applications and burner management systems. It is also suited for other industrial air and gas services which are compatible with the wetted parts. Standard models are available for weathertight or explosion-proof environments.

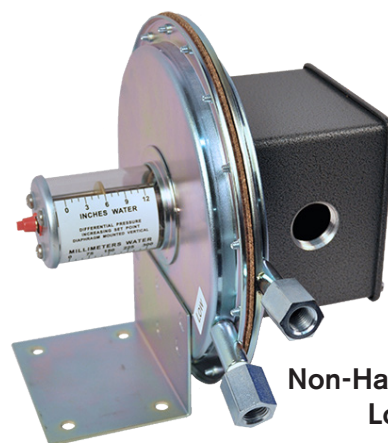

Non-Hazardous Locations



Hazardous Locations

Features and Benefits

- External Set Point adjustment with visual scale
- Fine Set Point resolution
- Narrow dead band
- High repeatability
- UL Listed and CSA Certified snap-action switching elements
- Screw terminals standard on weathertight switches; wire leads standard on explosion proof
- Rugged design
- 3-year warranty from date of manufacture

Agency Listings/Certifications

- Rostechnadzor (RTN) standard (certificate available upon request)

Safety Certified to IEC 61508 (SIL)

- SOR products are certified to IEC 61508 for non-redundant use in SIL1 and SIL2 Safety Instrumented Systems for most models. For more details or values applicable to a specific product, see the Safety Integrity Level Quick Guide (Form 1528).

How to Order

Adjustable Range		Contact Rating		Model Number	Typical Dead Band	
in. wc	mm wc				in. wc	mm wc
0 to 12	0 to 305	15 amps 5 amps 0.4 amps	250 VAC 30 VDC* 125 VDC*	107AL - N12 - P1 - F0A	0.25	6.4
5 to 40	125 to 1000			107AL - N40 - P1 - F0A	0.3	7.5
0 to 12	0 to 305			107AL - K12 - P1 - F0A	0.3	7.5
5 to 40	125 to 1000			107AL - K40 - P1 - F0A	0.35	9.0


Product Specifications			
Electrical Housing		Electrical Service	
Type	Weathertight NEMA 4	Contact form	SPDT
Material	6063-T5 aluminum	* DC electrical ratings are for resistive loads only.	
Pressure Ports		They may not be agency approved, listed or certified, but have been verified by testing or experience.	
Material	Plated cold-rolled steel	Temperature Limits	
Connection size	1/8" NPT(F)	Ambient	-40 to 150°F (−40 to 65°C)
	For 1/4" NPT(F), change F0A to F1A in selected model.	Process	-40 to 150°F (−40 to 65°C)
Wetted Materials	Buna-N, brass, aluminum, cork, stainless steel, acrylic tubing, nylon, plated cold-rolled steel	Max System Pressure	10 psig (.69 bar) Vacuum protected to 30" Hg
Electrical Connection	3/4" NPT(F); screw terminals	Weight	Approximate 5 lb (2.3 kg)

Accessories

NOTE: see page 4 for Test Certificates

Dimensions are for reference only.
Contact the factory for certified drawings for a particular model number.

Drawing 0090594

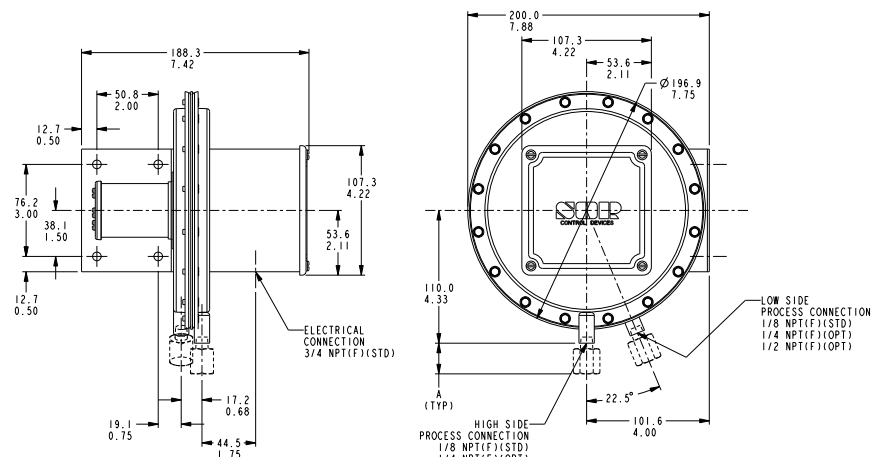

Low Differential Pressure Switches

How to Order

Select model number from table. Accessory designators may be added after **F0A** if required.

Adjustable Range		Contact Form	Model Number	Typical Dead Band	
in. wc	mm wc			in. wc	mm wc
0 to 12	0 to 305	SPDT	107EL - EF12 - P1 - F0A	0.3	7.5
		DPDT	107EL - EG12 - P1 - F0A	0.5	13
5 to 40	125 to 1000	SPDT	107EL - EF40 - P1 - F0A	0.6	15
		DPDT	107EL - EG40 - P1 - F0A	0.8	20

Product Specifications

Electrical Housing

Type Contains explosion-proof hermetically sealed switching element. See Electrical Service. Class I, Groups A, B, C, D; Class II, Groups E, F, G; Divisions 1 & 2 Weathertight

Body Material

356-T6 aluminum

Pressure Ports

Material Plated cold-rolled steel
Connection size 1/8" NPT(F)
For 1/4" NPT(F), change F0A to F1A in selected model.

Wetted Materials

Buna-N, brass, aluminum, cork, stainless steel, acrylic tubing, nylon, plated cold-rolled steel

Electrical Connection

1/2" NPT(M); 18" stranded wire leads, 18-AWG color-coded and marked.

Temperature Limits

Ambient -40 to 150°F (-40 to 65°C)
Process -40 to 150°F (-40 to 65°C)

Electrical Service Contact ratings 5 amps 250 VAC
* 5.0 amps 30 VDC
* 0.5 amps 125 VDC

The hermetically sealed switching element capsule is UL Listed, CSA Certified and SAA Approved as an explosion-proof snap switch per the following table.

Agency	Hazardous Location Conditions
UL	Weathertight Class I, Groups A, B, C, & D; Class II, Groups E, F, & G; Divisions 1 & 2
CSA Certified	Ex s Zone 2 IIC T4 IP65 Ex tD A22 T105°C IP65
SAA Approved	Ex s Zone 2 IIC T4 IP65 Ex tD A22 T105°C IP65
ATEX Approved	II 2 EEx m II

*DC electrical ratings are for resistive loads only. DC ratings are not agency approved or listed but have been verified by testing or experience.

Max. System Pressure 10 psig (.69 bar)
Vacuum protected to 30" Hg

Weight Approximate 5 lb. (2.3 kg)

Design and specifications are subject to change without notice. For latest revision, see www.sorinc.com.

Accessories

Description	Designator
Canadian Registration Number (CRN) - Process ratings may be affected. Consult the factory for details as required.	CV
Explosion-proof and weathertight junction box with screw terminals. Aluminum 3/4" NPT(F) top or right conduit connections. UL Listed and CSA Certified Class I, Groups A, B, C, & D; Class II, Groups E, F, & G; Divisions 1 & 2. Includes cover o-ring for weathertight applications. Only available with 'EL' housing.	TB*

* Agency ratings for SOR product sold with junction boxes will be limited to either the rating of the instrument housing or the junction box, whichever is lower.

NOTE: see page 4 for Test Certificates


Dimensions

Dimensions are for reference only.

Contact the factory for certified drawings for a particular model number.

Linear = $\frac{\text{mm}}{\text{in.}}$

Drawing 0090593

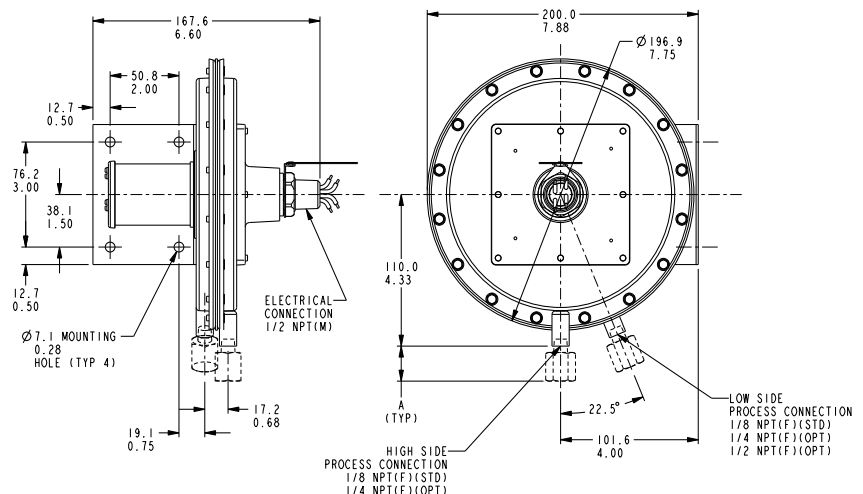

Low Differential Pressure Switches

Test Certificates

Certificates	C1	C2	C3	C4	C5	C6	C8	B1	B4	B5	B6	B7	A1	A2	A3	A4	A5	A6	A7	A8
Calibration	◆							◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
Hydrostatic Pressure Test		◆						◆	◆					◆	◆	◆	◆	◆	◆	◆
Inspection Report			◆					◆	◆	◆	◆	◆			◆	◆		◆	◆	◆
Compliance / Conformance				◆								◆	◆	◆		◆	◆			◆
Dielectric Test					◆				◆	◆									◆	
Insulation Resistance						◆			◆	◆	◆							◆	◆	◆
Typical Material of Wetted Parts							◆	◆	◆				◆				◆	◆		



По вопросам продаж и поддержки обращайтесь: sro@nt-rt.ru

www.sor.nt-rt.ru

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04

Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64

Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Казахстан (7273)495-231

Киргизия (996)312-96-26-47

Таджикистан (992)427-82-92-69